
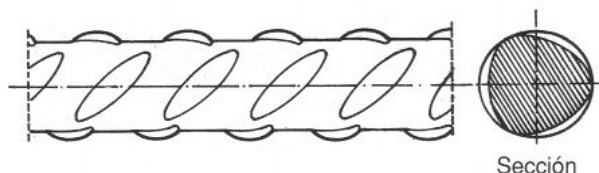


Aceros Inoxidables Deltametal, S.L.

Vía Augusta, 15, 703 / 08006 Barcelona / tel +34 93 2172396 / fax +34 93 2178739

WEB: <http://www.deltametal.es> / E-mail: delta@deltametal.es**BARRA CORRUGADA EN ACERO INOXIDABLE****TIPOS DE ACERO INOXIDABLE STANDARD**

AISI	DIN	AFNOR	BS	SIS
304	1.4301	Z7CN 18-09	304S31	2333-28
316L	1.4404	Z3CND17-11-02	316S11	2348-28

DIÁMETROS DE FABRICACIÓN

Diámetro nominal mm	Sección mm ²	Peso Kg/m
3	7,1	0,055
4	12,7	0,100
6	28,3	0,225
8	50,3	0,396
10	78,5	0,620
12	113,1	0,890
14	153,9	1,210
16	201	1,580
20	314	2,470
25	491	3,870
28	616	4,830
32	804	6,310

NORMAS DE FABRICACIÓN

UNE	36 - 067
BS	BS 6744
AFNOR	NFA - 35019
DIN	DIN 488, DIN 17440

CARACTERÍSTICAS MECÁNICAS

	Diámetro mm	
	de 3 a 14 mm	de 16 a 32 mm
Rt	> 800 N/mm ²	> 700 N/mm ²
Rp (0,2)	> 600 N/mm ²	> 525 N/mm ²
A (5xd) %	> 12%	> 15%

FORMAS DE SUMINISTRO

ROLLOS de 350 kg
BARRAS DE 6 metros (+/- 50 mm)